

# HEAVY DUTY SUPPORT SOCKS – DOUBLE EYE LACE-UP

## **⚠ WARNING**


Cancer and Reproductive Harm: [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



## KEY FEATURES

- ✓ Made from stainless steel wire
- ✓ Designed for heavier cables
- ✓ Can support multiple cables in a bundle
- ✓ Used when the ends of the cable(s) are not accessible

Heavy Duty support socks made from stainless steel are perfect for supporting heavier cable, conduit or any other cylindrical object. Often used by Utilities and Contractors to support cables transitioning from overhead to underground. One may support multiple cables in one sock. The overall diameter of the cable bundle should fit within the listed range.

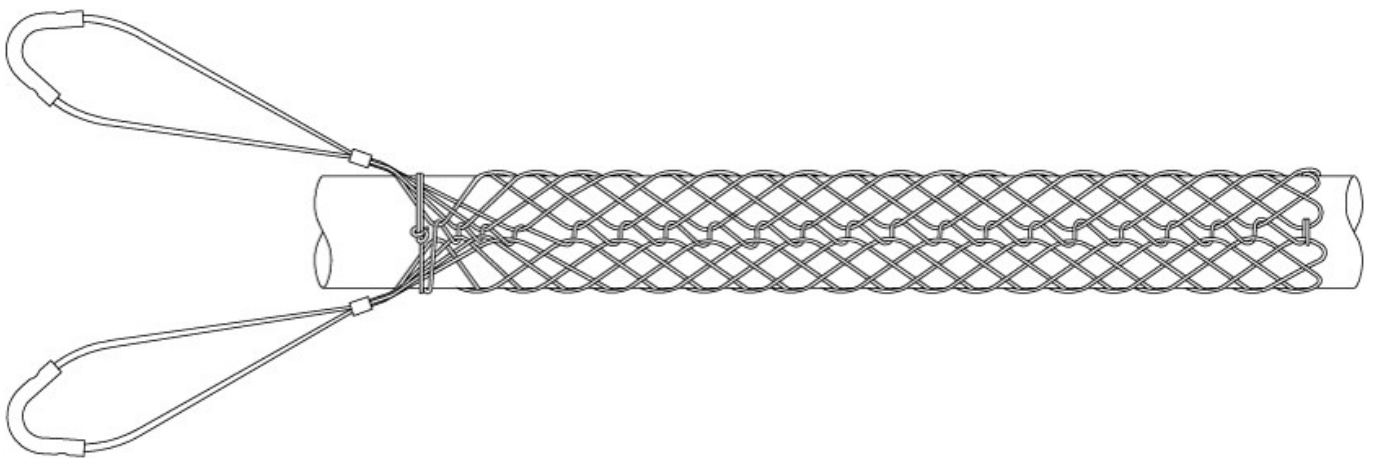

L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

## GET IN TOUCH

+61 3 8840 6556

sales@slingcoaustralia.com.au

# HEAVY DUTY SUPPORT SOCKS – DOUBLE EYE LACE-UP

Slingco Part No.	Range (in)	Range (mm)	Lattice Length (in)	Lattice Material	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS7087	0.50 - 0.63	13 - 16	11	316 SS	621	1,370
ZCS7088	0.63 - 0.75	16 - 19	12	316 SS	944	2,080
ZCS7089	0.75 - 1.00	19 - 25	13	316 SS	944	2,080
ZCS7090	1.00 - 1.25	25 - 32	15.5	316 SS	1,211	2,670
ZCS7091	1.25 - 1.50	32 - 38	16.5	316 SS	2,037	4,490
ZCS7092	1.50 - 1.75	38 - 44	23	316 SS	2,037	4,490
ZCS7093	1.75 - 2.00	44 - 51	22	316 SS	2,269	5,000
ZCS7094	2.00 - 2.50	51 - 63	26	316 SS	4,056	8,940
ZCS7095	2.50 - 3.00	63 - 76	24.5	316 SS	4,056	8,940
ZCS7096	3.00 - 3.50	76 - 87	29.5	316 SS	6,089	13,420
ZCS7097	3.50 - 4.00	87 - 102	37.5	316 SS	6,089	13,420

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Australia Pty. Ltd

#### Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

**Range dimension overlaps** If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

#### GET IN TOUCH

+61 3 8840 6556

sales@slingcoaustralia.com.au