

SPECIALTY HOSE RESTRAINT SOCKS - U TYPE

⚠ WARNING


Cancer and Reproductive Harm: www.P65Warnings.ca.gov



KEY FEATURES

- ✓ Prevents whipping from detached pressure hoses
- ✓ Universal eye fitting
- ✓ Made from 316 Stainless steel

U Type Universal Eye Hose Sock - 316 Stainless Steel

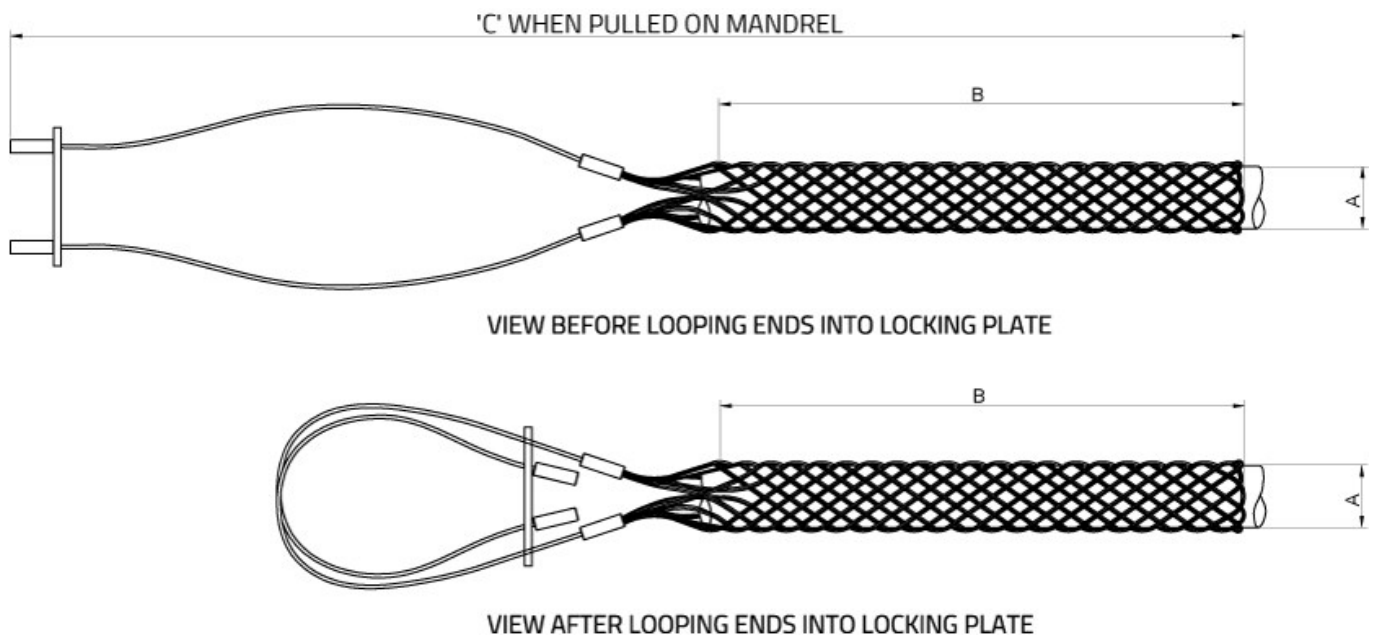

Slingco Part No.	Size Range (mm)	Size Range (in)	Approx. Break Load (kg)	Approx. Break Load (lb)	Ø A mean (mm)	Ø A mean (in)	B (mm)	B (in)	C (mm)	C (in)
ZCS5431	6 - 13	0.25 - 0.5	1,179	2,600	9.5	0.37	748	29.4	1,050	41.3
ZCS5432	13 - 19	0.5 - 0.75	1,588	3,500	16	0.62	670	26.4	1,013	39.9
ZCS5433	25 - 38	1.0 - 1.5	5,443	12,000	31.5	1.25	842	33.1	1,230	48.4

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Australia Pty. Ltd

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.



L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

GET IN TOUCH

+61 3 8840 6556

sales@slingcoaustralia.com.au


SPECIALTY HOSE RESTRAINT SOCKS - U TYPE

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

GET IN TOUCH

 +61 3 8840 6556

 sales@slingcoaustralia.com.au