

SPECIALTY HOSE RESTRAINT SOCKS - Y TYPE

⚠ WARNING


Cancer and Reproductive Harm: www.P65Warnings.ca.gov



KEY FEATURES

- ✓ Prevents whipping from detached pressure hoses
- ✓ Threaded bolt fitting
- ✓ Made from 316 Stainless steel

Y Type Threaded Bolt Hose Sock - 316 Stainless Steel

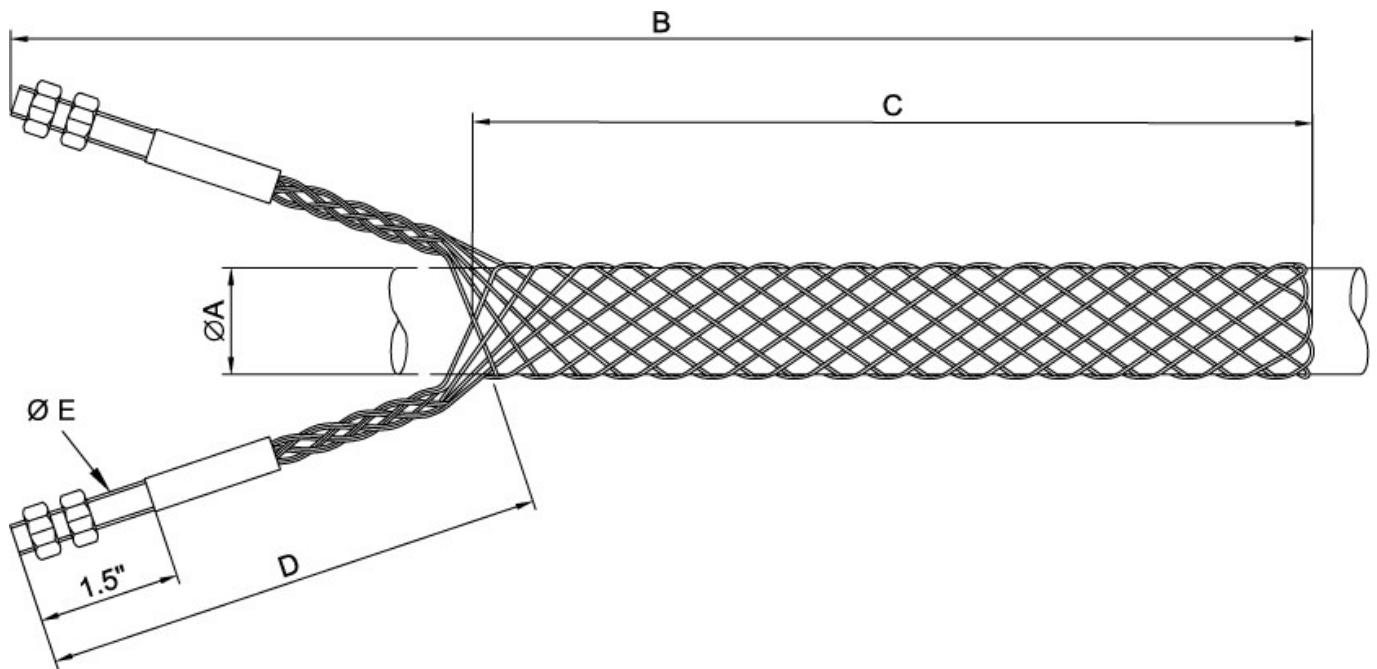

Slingco Part No.	Approx. Break Load (lb)	B (in)	C (in)	D (in)	Ø A mean (in)	Ø E (in)	Range (in)	Approx. Break Load (kg)	B (mm)	C (mm)	D (mm)	Ø A mean (mm)	Ø E (mm)	Range (mm)
ZCS5422	2,600	41.0	29.0	12.0	0.37	5/16 BSW	0.25 - 0.5	1,161	1,041	737	305	9.5	18 TPI	6 - 13
ZCS5423	3,500	39.0	27.0	12.0	0.62	5/16 BSW	0.5 - 0.75	1,562	991	686	305	16	18 TPI	13 - 19
ZCS5424	12,000	43.0	31.0	12.0	1.25	1/2 BSW	1.0 - 1.5	5,357	1,092	787	305	32	12 TPI	25 - 38



L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

GET IN TOUCH



+61 3 8840 6556



sales@slingcoaustralia.com.au

SPECIALTY HOSE RESTRAINT SOCKS - Y TYPE

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Australia Pty. Ltd

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



L9, 1 York Street, Sydney, NSW 2000, Australia **Sales:** +61 3 8840 6556

GET IN TOUCH



+61 3 8840 6556



sales@slingcoaustralia.com.au