


STAINLESS STEEL CONNECTOR/BOX SOCKS

⚠ WARNING


Cancer and Reproductive Harm: www.P65Warnings.ca.gov

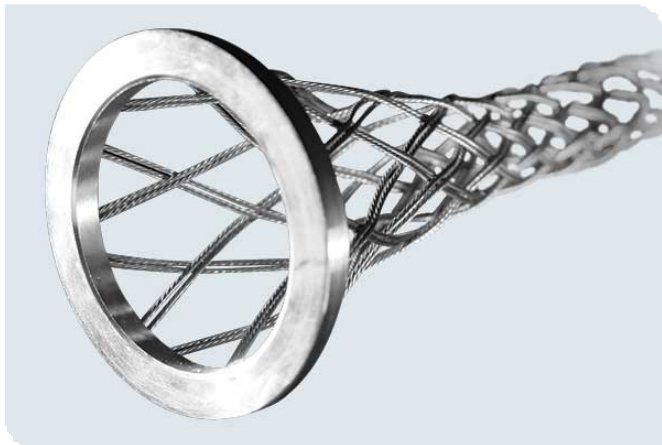

KEY FEATURES

- ✓ Dual weave lattice
- ✓ Made from 304 Stainless steel
- ✓ Reduces strain on electrical termination point connections

Dual Weave – these socks are designed with a ring to support electric cabling from termination point to reduce strain on the connections. 304 stainless steel.

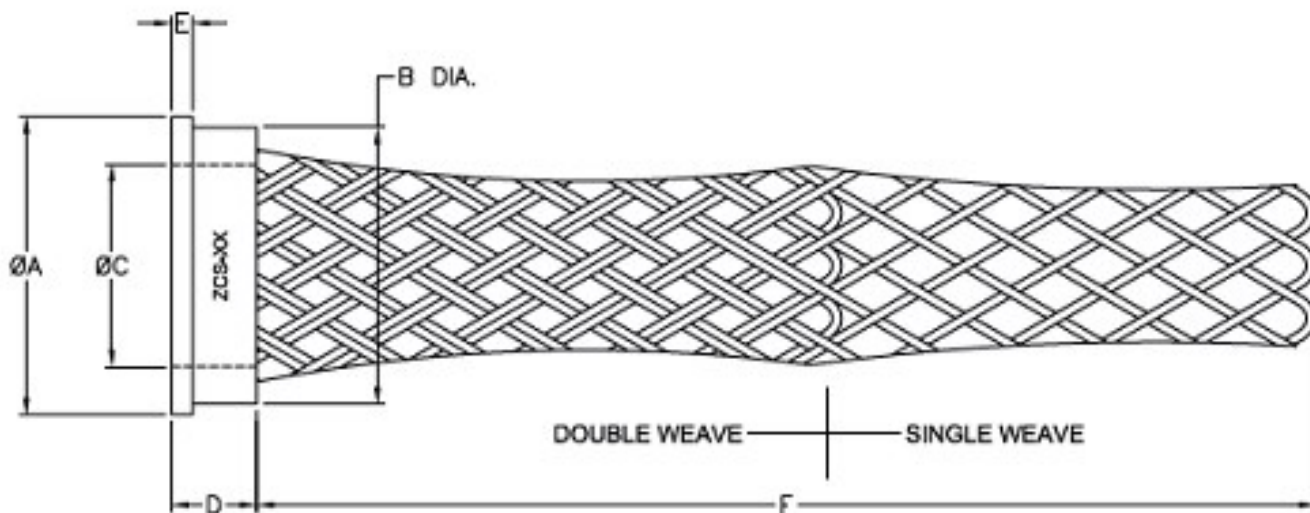

L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

GET IN TOUCH



+61 3 8840 6556



sales@slingcoaustralia.com.au

STAINLESS STEEL CONNECTOR/BOX SOCKS

Slingco Part No.	Cable dia min (mm)	Cable dia min (in)	Cable dia max (mm)	Cable dia max (in)	Ø A (mm)	Ø A (in)	B (mm)	B (in)	C (mm)	C (in)	D (mm)	D (in)	E (mm)	E (in)	F (mm)	F (in)	Approx. Breaking Strength (kg)	Approx. Breaking Strength (lb)
ZCS2208	5.1	0.2	6.4	0.25	31.8	1.25	28.4	1.12	7.9	0.31	7.1	0.281	3.2	0.125	76	3	225	500
ZCS2209	7.9	0.31	9.5	0.375	31.8	1.25	28.4	1.12	11.1	0.437	7.1	0.281	3.2	0.125	102	4	340	750
ZCS2210	10.4	0.41	12.7	0.5	31.8	1.25	28.4	1.12	14.3	0.562	7.1	0.281	3.2	0.125	127	5	340	750
ZCS2211	12.7	0.5	15.9	0.625	31.8	1.25	28.4	1.12	17.4	0.687	7.1	0.281	3.2	0.125	152	6	540	1,200
ZCS2212	15.5	0.61	19.1	0.75	31.8	1.25	28.4	1.12	20.6	0.812	7.1	0.281	3.2	0.125	178	7	540	1,200
ZCS2213	18	0.71	22.2	0.875	31.8	1.25	28.4	1.12	23.8	0.937	7.1	0.281	3.2	0.125	178	7.5	450	1,000
ZCS2214	19.6	0.77	23.8	0.937	31.8	1.25	28.4	1.12	24.1	0.948	5.6	0.219	-	-	203	8	360	800
ZCS2215	7.9	0.31	9.5	0.375	44.5	1.75	41.1	1.62	11.1	0.437	7.1	0.281	3.2	0.125	102	4	225	500
ZCS2216	10.4	0.41	12.7	0.5	44.5	1.75	41.1	1.62	14.3	0.562	7.1	0.281	3.2	0.125	127	5	340	750
ZCS2217	12.7	0.5	15.9	0.625	44.5	1.75	41.1	1.62	17.4	0.687	7.1	0.281	3.2	0.125	152	6	450	1,000
ZCS2218	15.5	0.61	19.1	0.75	44.5	1.75	41.1	1.62	20.6	0.812	7.1	0.281	3.2	0.125	178	7	450	1,000
ZCS2219	18	0.71	22.2	0.875	44.5	1.75	41.1	1.62	23.8	0.937	7.1	0.281	3.2	0.125	190	7.5	450	1,000
ZCS2220	20.8	0.82	25.4	1	44.5	1.75	41.1	1.62	27	1.062	7.1	0.281	3.2	0.125	215	8.5	450	1,000
ZCS2221	23.2	0.915	28.6	1.125	44.5	1.75	41.1	1.62	30.1	1.187	7.1	0.281	3.2	0.125	229	9	680	1,500
ZCS2222	25.9	1.02	31.8	1.25	44.5	1.75	41.1	1.62	33.3	1.312	7.1	0.281	3.2	0.125	254	10	450	1,000
ZCS2223	30	1.18	36.5	1.437	44.5	1.75	41.1	1.62	36.8	1.448	5.6	0.219	-	-	265	10.5	225	500
ZCS2224	12.7	0.5	15.9	0.625	57.2	2.25	53.8	2.12	17.4	0.687	7.1	0.281	3.2	0.125	152	6	450	1,000
ZCS2225	18	0.71	22.2	0.875	57.2	2.25	53.8	2.12	23.8	0.937	7.1	0.281	3.2	0.125	178	7.5	450	1,000
ZCS2226	23.2	0.915	28.6	1.125	57.2	2.25	53.8	2.12	30.1	1.187	7.1	0.281	3.2	0.125	229	9	680	1,500
ZCS2227	25.9	1.02	31.8	1.25	57.2	2.25	53.8	2.12	33.3	1.312	7.1	0.281	3.2	0.125	254	10	815	1,800
ZCS2228	31	1.22	38.1	1.5	57.2	2.25	53.8	2.12	39.7	1.562	7.1	0.281	3.2	0.125	279	11	815	1,800
ZCS2229	36.3	1.43	44.5	1.75	57.2	2.25	53.8	2.12	46	1.812	7.1	0.281	3.2	0.125	330	13	315	700
ZCS2230	30	1.18	49.2	1.937	57.2	2.25	53.8	2.12	49.5	1.948	5.6	0.219	-	-	365	14.5	155	350
ZCS2231	20.8	0.82	25.4	1	69.9	2.75	66.5	2.62	27	1.062	7.1	0.281	3.2	0.125	215	8.5	450	1,000
ZCS2232	25.9	1.02	31.8	1.25	69.9	2.75	66.5	2.62	33.3	1.312	7.1	0.281	3.2	0.125	254	10	680	1,500
ZCS2233	31	1.22	38.1	1.5	69.9	2.75	66.5	2.62	39.7	1.562	7.1	0.281	3.2	0.125	279	11	680	1,500
ZCS2234	36.3	1.43	44.5	1.75	69.9	2.75	66.5	2.62	46	1.812	7.1	0.281	3.2	0.125	330	13	815	1,800
ZCS2235	41.7	1.64	50.8	2	69.9	2.75	66.5	2.62	52.4	2.062	7.1	0.281	3.2	0.125	381	15	815	1,800
ZCS2236	46.7	1.84	57.2	2.25	69.9	2.75	66.5	2.62	58.7	2.312	7.1	0.281	3.2	0.125	406	16	680	1,500
ZCS2237	52.4	2.062	62.7	2.469	69.9	2.75	66.5	2.62	63.2	2.489	5.6	0.219	-	-	444	17.5	680	1,500
ZCS2238	34.9	1.375	44.5	1.75	82.6	3.25	79.2	3.12	46	1.812	7.1	0.281	3.2	0.125	330	13	905	2,000
ZCS2239	44.5	1.75	50.8	2	82.6	3.25	79.2	3.12	52.4	2.062	7.1	0.281	3.2	0.125	381	15	905	2,000
ZCS2240	46.7	1.84	57.2	2.25	82.6	3.25	79.2	3.12	58.7	2.312	7.1	0.281	3.2	0.125	406	16	905	2,000
ZCS2241	54	2.125	63.5	2.5	82.6	3.25	79.2	3.12	65.1	2.562	7.1	0.281	3.2	0.125	444	17.5	905	2,000
ZCS2242	63.5	2.5	73	2.875	82.6	3.25	79.2	3.12	74.1	2.918	5.6	0.219	-	-	483	19	905	2,000

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Australia Pty. Ltd

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

GET IN TOUCH



+61 3 8840 6556



sales@slingcoaustralia.com.au