

MU TYPE – HIGH STRENGTH CABLE SOCKS

⚠ WARNING

Cancer and Reproductive Harm: www.P65Warnings.ca.gov




KEY FEATURES

- ✓ Triple weave construction
- ✓ Used for heavy duty pulling
- ✓ Suitable for bare or insulated cable, conductor or wire
- ✓ Colour coded for easy identification

This sock's multi-weave construction (triple, double, single) is ideal for heavy loads. MU cable socks are colour coded for ease of identification. Perfect for stringing overhead transmission and distribution lines and heavy-load pulls of any kind. Use with bare or insulated cable, conductor or wire. The flexible eye connects with Slingco line pulling swivels for trouble free pulling applications. Made of Galvanised steel.

Note: Not recommended for pulling static or guy wire. Use High Strength 'A-Type' sock when pulling static or guy wire.

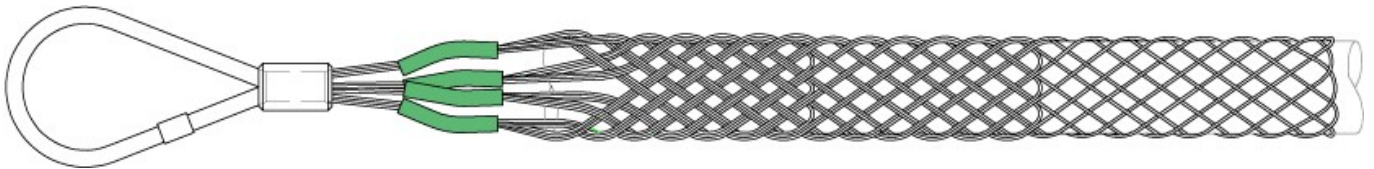

| Slingco Part No. | Colour | Range (in) | Range (mm) | Lattice Length (in) | Lattice Length (mm) | ABL (lb) | ABL (kg) |
|------------------|-------------|-------------|------------|---------------------|---------------------|----------|----------|
| ZCS1710 | Dark Green | 0.25 - 0.50 | 6-12 | 31 | 787 | 7,000 | 3,170 |
| ZCS1711 | Brown | 0.50 - 0.75 | 12-19 | 45 | 1,143 | 10,500 | 4,760 |
| ZCS1712 | Light Blue | 0.75 - 1.00 | 19-25 | 43 | 1,092 | 14,100 | 6,395 |
| ZCS1713 | Gold | 1.00 - 1.25 | 25-32 | 65 | 1,651 | 25,000 | 11,340 |
| ZCS1714 | Black | 1.25 - 1.50 | 32-38 | 59 | 1,499 | 31,000 | 14,065 |
| ZCS1715 | Red | 1.50 - 1.75 | 38-44 | 82 | 2,083 | 31,000 | 14,065 |
| ZCS1716 | Dark Blue | 1.75 - 2.25 | 44-57 | 82 | 2,083 | 49,000 | 22,230 |
| ZCS1750 | Yellow | 2.00 - 2.50 | 51-63 | 72 | 1,829 | 49,000 | 22,230 |
| ZCS1751 | Orange | 2.50 - 3.00 | 63-76 | 72 | 1,829 | 49,000 | 22,230 |
| ZCS1752 | Aluminium | 3.00 - 3.50 | 76-89 | 74 | 1,880 | 49,000 | 22,230 |
| ZCS1753 | Light Green | 3.50 - 4.00 | 89-102 | 76 | 1,930 | 49,000 | 22,230 |

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Australia Pty. Ltd

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.



L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

GET IN TOUCH

+61 3 8840 6556

sales@slingcoaustralia.com.au


MU TYPE – HIGH STRENGTH CABLE SOCKS

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



L9, 1 York Street, Sydney, NSW 2000, Australia **Sales:** +61 3 8840 6556

GET IN TOUCH

 +61 3 8840 6556

 sales@slingcoaustralia.com.au