

ST TYPE - SINGLE EYE DOUBLE WEAVE CABLE SOCKS

⚠ WARNING


Cancer and Reproductive Harm: www.P65Warnings.ca.gov



KEY FEATURES

- ✓ Double weave construction
- ✓ Increased pulling strength
- ✓ Protective shoulders to prevent abrasion
- ✓ Flexible eye easy match with line swivel

This Slingco cable sock features a double weave construction for medium to heavy pulling applications in underground installations.

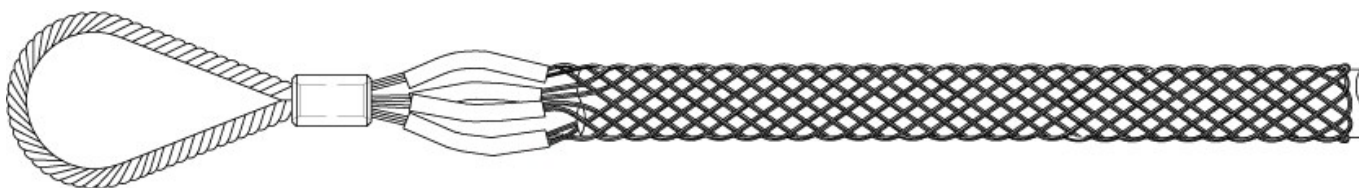

Short Length - Galvanised Steel

Slingco Part No.	Range (mm)	Range (in)	Lattice Length (mm)	Lattice Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS2511	13 - 16	0.50 - 0.62	534	21	2,040	4,500
ZCS2512	16 - 19	0.62 - 0.75	610	24	2,540	5,600
ZCS2513	19 - 25	0.75 - 1.00	610	24	3,085	6,800
ZCS2514	25 - 38	1.00 - 1.50	610	24	4,355	9,600
ZCS2515	38 - 50	1.50 - 2.00	610	24	7,441	16,400
ZCS2516	50 - 63	2.00 - 2.50	610	24	8,390	18,500
ZCS2517	63 - 76	2.50 - 3.00	610	24	11,115	24,500
ZCS2518	76 - 89	3.00 - 3.50	610	24	11,115	24,500
ZCS2519	89 - 102	3.50 - 4.00	660	26	14,065	31,000

Longer Length - Galvanised Steel

Slingco Part No.	Range (mm)	Range (in)	Lattice Length (mm)	Lattice Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS2520	19 - 25	0.75 - 1.00	914	36	3,085	6,800
ZCS2521	25 - 38	1.00 - 1.50	914	36	4,355	9,600
ZCS2522	38 - 50	1.50 - 2.00	914	36	7,440	16,400
ZCS2523	50 - 63	2.00 - 2.50	914	36	8,390	18,500
ZCS2524	63 - 76	2.50 - 3.00	914	36	11,115	24,500
ZCS2777	76 - 89	3.00 - 3.50	914	36	11,115	24,500
ZCS2778	89 - 102	3.50 - 4.00	1,010	40	14,065	31,000



L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

GET IN TOUCH

+61 3 8840 6556

sales@slingcoaustralia.com.au

ST TYPE - SINGLE EYE DOUBLE WEAVE CABLE SOCKS

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Australia Pty. Ltd

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

GET IN TOUCH



+61 3 8840 6556



sales@slingcoaustralia.com.au