

2K STRAP HOIST

CONTROLLED MOTION HOIST FOR SPLICING, DEAD ENDING, & SAGGING LINES



VIEW PRODUCT MANUAL



ZLH14321 2K HOIST



ZLH14447
2K HOT STICK OPERATED HOIST

- ASME B-30-21 compliant
- 125% working load tested
- Hi-viz yellow strap
- Interlocking pawl lever system
- Replacement parts readily available
- Hot stick operable version

Linemen use the Slingco 2k Strap Hoist to splice, dead end, and sag lines. The Slingco 2k Strap Hoist features an interlocking pawl lever system with dual pawl springs for controlled tightening and releasing of the strap and to ensure the hoist is engaged while in use. The strap hoist complies with ASME B-30-21 standard and all units are tested to 125% of load.

The Slingco 2k Strap Hoist uses pressure die castings for a professional look, consistent material properties, and a smooth finish. The strap is hi-viz bright yellow in colour for easy visibility.

The strap hoist has three operating positions: lift/pull, lower/release, and freewheeling. The strap hoist has a QR code on the product, so the manual is always accessible.

Slingco Part No.	Type	SINGLE LINE						DOUBLE LINE							
		Capacity		Lift		Headroom		Capacity		Lift		Headroom		Tool weight	
		(lb)	(kg)	(ft)	(m)	(in)	(mm)	(lb)	(kg)	(ft)	(m)	(in)	(mm)	(lb)	(kg)
ZLH14321	Standard	1,000	453	9.5	2.9	15.5	394	2,000	907	4.6	1.4	18.5	470	8.46	3.84
ZLH14447	Hot stick operated	1,000	453	9.5	2.9	15.5	394	2,000	907	4.6	1.4	18.5	470	9.04	4.10

⚠ WARNING

Cancer and Reproductive Harm
www.P65Warnings.ca.gov



3K STRAP HOIST


CONTROLLED MOTION HOIST FOR SPLICING, DEAD ENDING, & SAGGING LINES



VIEW PRODUCT MANUAL



ZLH10504 3K HOIST

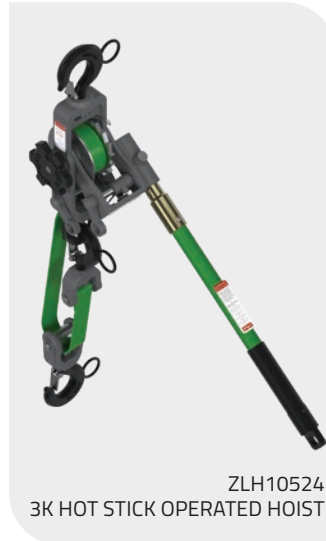

ZLH10524
3K HOT STICK OPERATED HOIST

- ASME B-30-21 compliant
- 125% working load tested
- Hi-viz green strap
- Interlocking pawl lever system
- Replacement parts readily available
- Hot stick operable version

Linemen use the Slingco 3k Strap Hoist to splice, dead end, and sag lines. The Slingco 3k Strap Hoist features an interlocking pawl lever system with dual pawl springs for controlled tightening and releasing of the strap and to ensure the hoist is engaged while in use. The strap hoist complies with ASME B-30-21 standard and all units are tested to 125% of load.

The Slingco 3k Strap Hoist uses pressure die castings for a professional look, consistent material properties, and a smooth finish. The strap is hi-viz bright green in colour for easy visibility.

The strap hoist has three operating positions: lift/pull, lower/release, and freewheeling. The strap hoist has a QR code on the product, so the manual is always accessible.

Slingco Part No.	Type	SINGLE LINE						DOUBLE LINE						Tool weight (lb) (kg)	
		Capacity		Lift		Headroom		Capacity		Lift		Headroom			
		(lb)	(kg)	(ft)	(m)	(in)	(mm)	(lb)	(kg)	(ft)	(m)	(in)	(mm)		
ZLH10504	Standard	1,500	680	10	3	21	533	3,000	1,360	5	1.5	25	635	11.25	5.1
ZLH10524	Hot stick operated	1,500	680	10	3	18	457	3,000	1,360	5	1.5	25	635	11.5	5.22

⚠ WARNING

Cancer and Reproductive Harm
www.P65Warnings.ca.gov

FOR ANY ENQUIRIES CALL TODAY ON
+61 3 8840 6556



Slingco Australia Pty. Ltd.
L9, 1 York Street, Sydney, NSW 2000, Australia
Tel: +61 3 8840 6556 · sales@slingcoaustralia.com.au

slingcoaustralia.com.au