



Isolating Link and Spiral Link Sticks

Added protection for
primary voltage work



ISOLATING LINK AND SPIRAL LINK STICKS





Slingco's Isolating Link and Spiral Link Sticks provide enhanced electrical isolation when used with strap hoists on primary voltage lines. Built tough for utility crews, they're a reliable safeguard for energised work zones.

Slingco's Isolating Link Sticks are available in 6 inch (152.5 mm) and 12 inch (305 mm) lengths, each isolating link comes equipped with a swivel eye on one end and your choice of a standard hook or a hot stick operated hook, ensuring compatibility with various jobsite requirements.

Slingco's Spiral Link Stick has 12" (305 mm) of fiberglass and is 24" (610 mm) overall. It comes equipped with a swivel eye on one end and a spiral hook on the other.

- ✓ Added protection when used properly with strap hoists on energised lines
- ✓ Compatible with most hoists
- ✓ Tested to ASTM F711 standards
- ✓ Isolating link sticks come standard with swivel eye and choice of standard or hot stick operated hook
- ✓ Designed for quick connection and easy handling
- ✓ Rugged, utility-grade construction

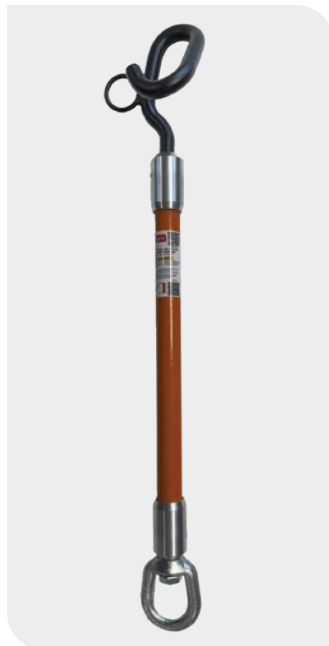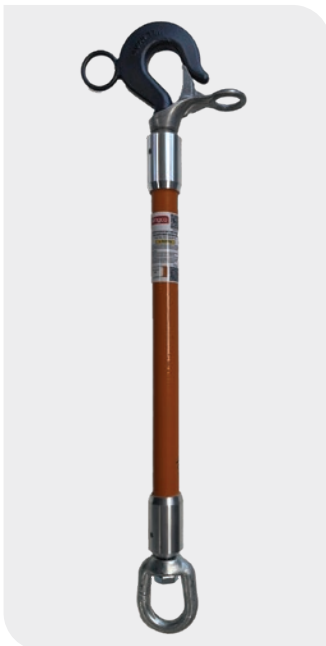

Slingco Part No.	Description	Fibreglass length in (mm)	Working load limit lb (kg)
HLT13431-6	Isolating Link w/ Standard Hook & Swivel End (6")	6" (152.5)	4,000 (1,814)
HLT13431-12	Isolating Link w/ Standard Hook & Swivel End (12")	12" (305)	4,000 (1,814)
HLT13432-6	Isolating Link w/ Hot Stick Operated Hook & Swivel End (6")	6" (152.5)	4,000 (1,814)
HLT13432-12	Isolating Link w/ Hot Stick Operated Hook & Swivel End (12")	12" (305)	4,000 (1,814)
HLT13433	Spiral Link Stick (24")	12" (305)	2,000 (907)



⚠ WARNING

Cancer and Reproductive Harm
www.P65Warnings.ca.gov



Slingco Australia Pty. Ltd.
 L9, 1 York Street, Sydney, NSW 2000, Australia
 Tel: +61 3 8840 6556 · sales@slingcoaustralia.com.au

For any enquiries call or visit
+61 3 8840 6556 | slingco.com