


HEAVY DUTY SUPPORT GRIPS – DOUBLE EYE

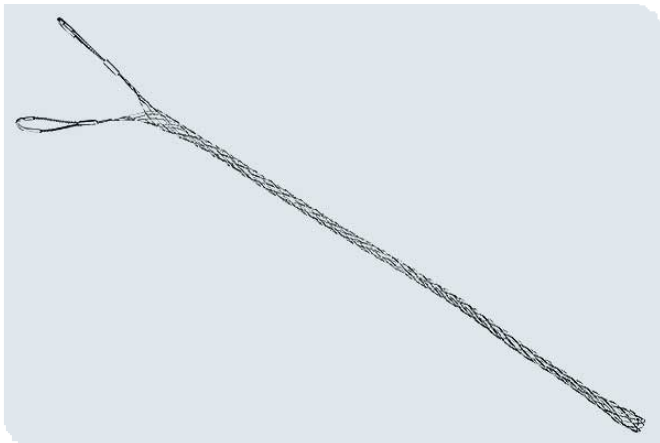


KEY FEATURES

- ✓ Made from stainless steel wire
- ✓ Designed for heavier cables
- ✓ Can support multiple cables in a bundle

Double Eye Heavy Duty Support Grips made from stainless steel are perfect for supporting heavier cable, conduit or any other cylindrical object. Often used by utilities and contractors to support cables transitioning from overhead to underground.

One may support multiple cables in one grip. The overall diameter of the cable bundle should fit within the listed range.

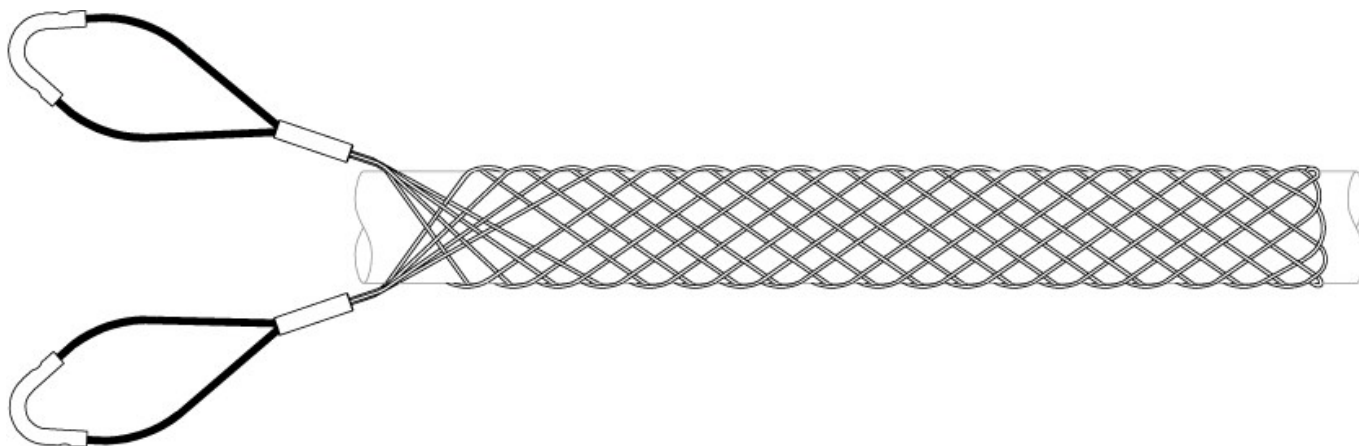

Slingco Part No.	Range (mm)	Range (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS3057	13 - 16	0.50 - 0.63	621	1,370
ZCS3058	16 - 19	0.63 - 0.75	944	2,080
ZCS3059	19 - 25	0.75 - 1.00	944	2,080
ZCS7136	25 - 32	1.00 - 1.25	1,211	2,670
ZCS7137	31 - 38	1.25 - 1.50	2,037	4,490
ZCS7138	38 - 44	1.50 - 1.75	2,037	4,490
ZCS7139	44 - 50	1.75 - 2.00	2,268	5,000
ZCS7140	50 - 63	2.00 - 2.50	4,056	8,940
ZCS7141	63 - 76	2.50 - 3.00	4,056	8,940
ZCS7142	76 - 89	3.00 - 3.50	5,445	12,000
ZCS7143	89 - 102	3.50 - 4.00	5,445	12,000
ZCS7144	102 - 114	4.00 - 4.50	5,445	12,000
ZCS7145	114 - 127	4.50 - 5.00	5,445	12,000



GET IN TOUCH

01706 855 558

sales@slingco.com

HEAVY DUTY SUPPORT GRIPS – DOUBLE EYE

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



GET IN TOUCH

 01706 855 558

 sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478