


SPECIALITY HOSE RESTRAINT GRIPS - U TYPE

⚠️ WARNING


Cancer and Reproductive Harm: www.P65Warnings.ca.gov

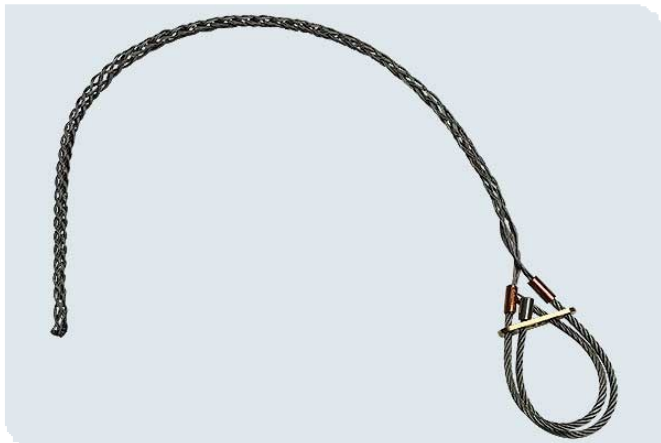

KEY FEATURES

- ✓ Prevents whipping from detached pressure hoses
- ✓ Universal eye fitting
- ✓ Made from 316 Stainless steel

U Type Universal Eye Hose Grip - 316 Stainless Steel

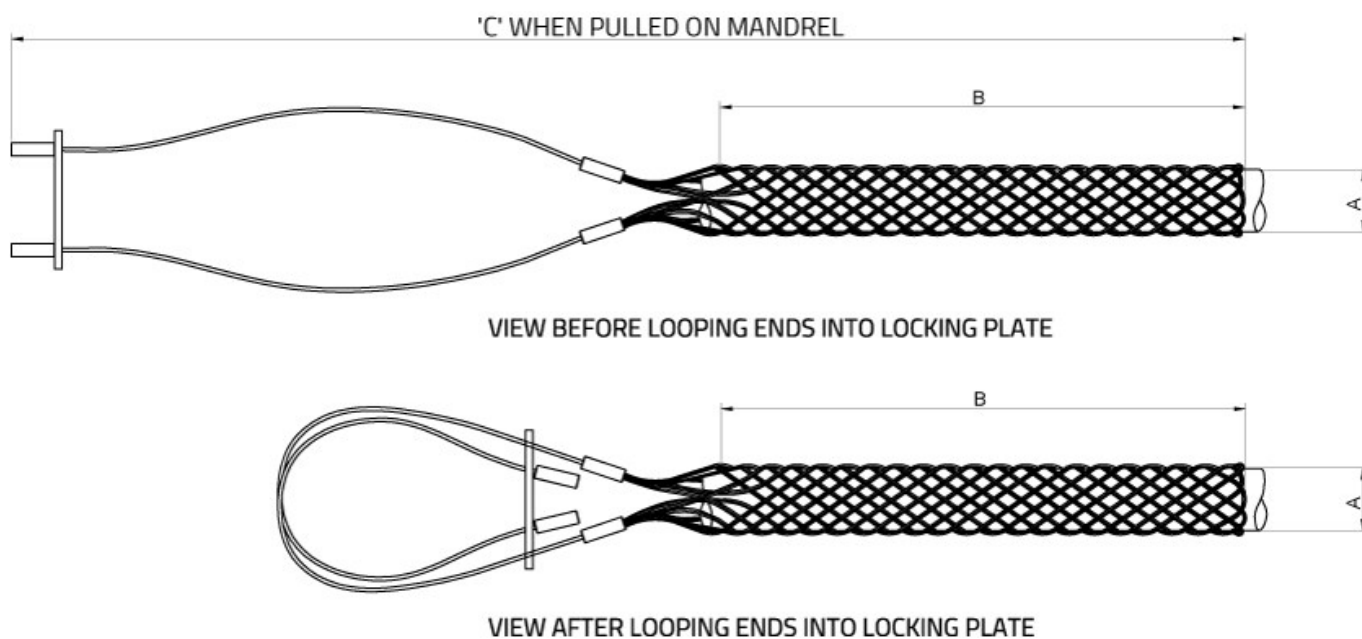

Slingco Part No.	Size Range (mm)	Size Range (in)	Approx. Break Load (kg)	Approx. Break Load (lb)	Ø A mean (mm)	Ø A mean (in)	B (mm)	B (in)	C (mm)	C (in)
ZCS5431	6 - 13	0.25 - 0.5	1,179	2,600	9.5	0.37	748	29.4	1,050	41.3
ZCS5432	13 - 19	0.5 - 0.75	1,588	3,500	16	0.62	670	26.4	1,013	39.9
ZCS5433	25 - 38	1.0 - 1.5	5,443	12,000	31.5	1.25	842	33.1	1,230	48.4

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

SPECIALITY HOSE RESTRAINT GRIPS - U TYPE

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



GET IN TOUCH

 01706 855 558

 sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478