


WIND TURBINE CABLE GRIP - HEAVY DUTY THIMBLE OFFSET EYE

⚠️ WARNING

Cancer and Reproductive Harm: www.P65Warnings.ca.gov

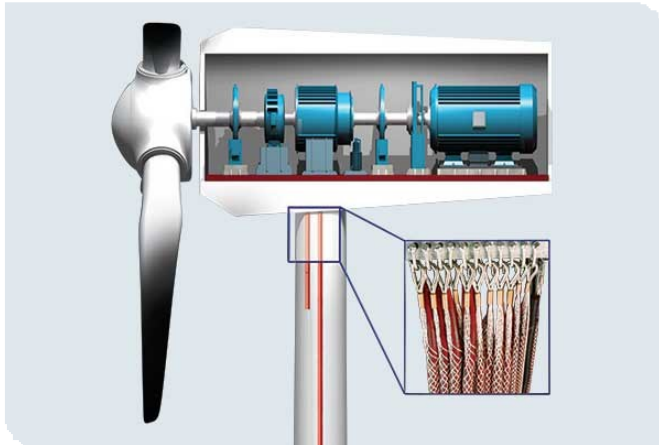

KEY FEATURES

- ✓ Designed for minimal contact with the actual cable
- ✓ High working loads and cable support
- ✓ Manufactured from 316 Stainless Steel
- ✓ Rounded copper ferrules
- ✓ Bespoke design options available

Slingco has developed a range of cable grips tailored for the renewable energy sector for use in:

- Cable installation – on-shore and off-shore
- Cable support inside wind turbines
- Cable management

For wind turbines, special features have been adapted to allow for minimal contact with the actual cable while still allowing excellent working loads and cable support.

The Slingco Wind Turbine Support Grip is manufactured from 316 Stainless Steel, providing cable support and control inside the wind turbine. It features rounded copper ferrules, offering reduced cable contact for high vibration environments. Custom grips can also be adapted to meet any requirement.

| Slingco Part No. | Range (mm) | Range (in) | Lattice Length (mm) | Lattice Length (in) | Approx. Break Load (kg) | Approx. Break Load (lb) |
|------------------|------------|-------------|---------------------|---------------------|-------------------------|-------------------------|
| ZCS2844 | 8 - 10 | 0.31 - 0.40 | 480 | 19 | 660 | 1,455 |
| ZCS2845 | 10 - 15 | 0.40 - 0.60 | 438 | 17.25 | 1,036 | 2,284 |
| ZCS2846 | 15 - 20 | 0.60 - 0.80 | 426 | 16.75 | 1,316 | 2,901 |
| ZCS2847 | 20 - 25 | 0.80 - 0.99 | 461 | 18 | 2,080 | 4,586 |
| ZCS2848 | 25 - 30 | 1.0 - 1.19 | 413 | 16.25 | 2,480 | 5,467 |
| ZCS2849 | 30 - 40 | 1.20 - 1.58 | 470 | 18.5 | 3,500 | 7,716 |
| ZCS2850 | 40 - 50 | 1.58 - 1.98 | 825 | 32.5 | 4,890 | 10,781 |
| ZCS2851 | 50 - 60 | 1.98 - 2.37 | 840 | 33 | 4,895 | 10,791 |
| ZCS2852 | 60 - 70 | 2.38 - 2.77 | 788 | 31 | 6,424 | 14,163 |
| ZCS2853 | 70 - 90 | 2.77 - 3.55 | 1,135 | 44.5 | 6,424 | 14,163 |
| ZCS2854 | 90 - 110 | 3.55 - 4.33 | 799 | 31.5 | 8,331 | 18,367 |

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

WIND TURBINE CABLE GRIP - HEAVY DUTY THIMBLE OFFSET EYE


Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



GET IN TOUCH

 01706 855 558

 sales@slingco.com