

JR LIGHT DUTY PULLING GRIPS

⚠ WARNING


Cancer and Reproductive Harm: www.P65Warnings.ca.gov



KEY FEATURES

- ✓ Easy to install
- ✓ Strong galvanized wire construction
- ✓ Reusable

Light duty pulling grips. Designed with flexible eye and made of galvanized wire. Use for lighter weight pulling applications like pulling through conduit runs or indoor pulls.

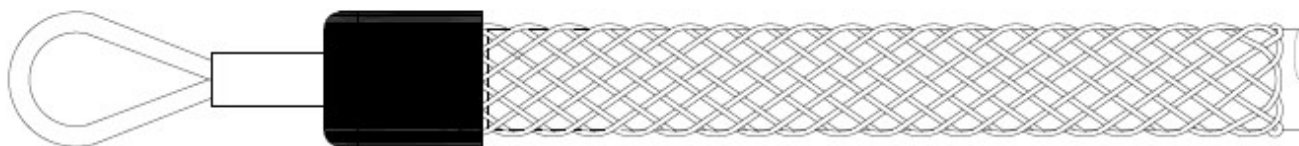

GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

JR LIGHT DUTY PULLING GRIPS

Slingco Part No	Range (in)	Range (mm)	Lattice Length (in)	Lattice Length (mm)	Eye Length (in)	Eye Length (mm)	Approx. Break Load (lb)	Approx. Break Load (kg)
ZCS8562	0.25 - 0.37	6.4 - 9.5	7.5	190.5	2.5	63.5	450	204
ZCS8563	0.37 - 0.50	9.5 - 13.0	11	279.4	3	76.2	900	408
ZCS8564	0.50 - 0.63	13.0 - 16.0	12.5	317.5	3	76.2	1,300	589
ZCS8643	0.50 - 0.75	13.0 - 19.0	16.5	419.1	4.5	114.3	2,240	1,016
ZCS8565	0.63 - 0.75	16.0 - 19.0	16.5	419.1	4.5	114.3	1,950	884
ZCS8566	0.75 - 1.00	19.0 - 25.0	17	431.8	4	101.6	2,800	1,270
ZCS8567	1.00 - 1.25	25.0 - 32.0	17.5	444.5	4.5	114.3	3,900	1,769

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



GET IN TOUCH

01706 855 558

sales@slingco.com