



# Strap Hoists

Splice, dead end, and sag lines quickly and efficiently



# Strap Hoists

Splice, dead end, and sag lines quickly and efficiently

Linemen use the Slingco Strap Hoist to splice, dead end, and sag lines. The Slingco strap hoist features an easy to operate pressure die cast drum for a professional look and smooth finish to minimize the risk of strap fraying.


The hoist also features an interlocking pawl system with dual pawl springs for controlled tightening and releasing of the strap which ensures that the hoist is engaged while in use. The fiberglass handle assembly color matches to each colored strap to ensure use of appropriate handle with correct hoist.

The straps are Hi-Vis bright green, blue, and yellow in color for easy visibility and identification. Strap hoists may be operated in single line or double line modes for capacity required.

- ✓ ASME B.30.21 compliant
- ✓ 125% working load tested
- ✓ Interlocking pawl lever system
- ✓ Replacement parts readily available
- ✓ Hot stick operable version

The strap hoist has three operations: lift/pull, lower/release, and freewheeling. For information while in the field, use the QR code found on Slingco products to quickly reach the user manual as well as helpful safety information while mobile. All strap hoists comply with ASME B.30.21 standard and all units are tested to 125% of load.

## 2K STRAP HOIST

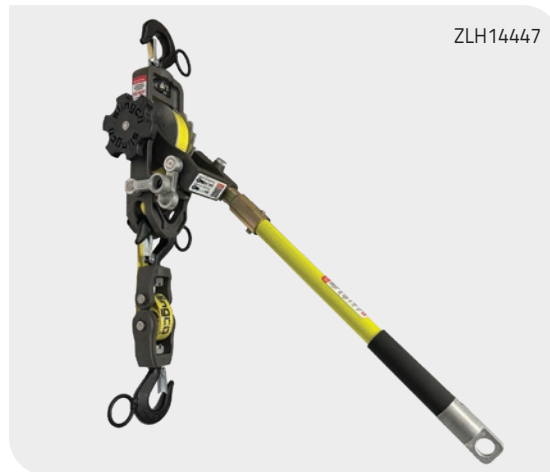

The Slingco 2K strap features a Hi-Viz yellow strap for easy identification. In single line mode capacity is 1K. When used in double line mode capacity is 2K. The 2k Strap Hoist has a pressure die cast drum for professional look and smooth finish to minimize the risk of strap fraying. The strap hoist has three operating positions: lift/pull, lower/release, and freewheeling.

For information while in the field, use the QR code on Slingco products to quickly reach manual and helpful information on your mobile.

Slingco Part No.	Type	SINGLE LINE						DOUBLE LINE							
		Capacity		Lift		Headroom		Capacity		Lift		Headroom		Tool weight	
		lb	kg	ft	m	in	mm	lb	kg	ft	m	in	mm	lb	kg
ZLH14321	Standard	1,000	453.6	9	2.7	15.5	393.7	2,000	907	4.25	1.3	18.5	469.9	8.46	3.84
ZLH14447	Hot stick operated	1,000	453.6	9	2.7	15.5	393.7	2,000	907	4.25	1.3	18.5	469.9	9.04	4.10


## 3K STRAP HOIST



The Slingco 3K strap features a Hi-Viz green strap for easy identification. In single line mode capacity is 1.5K. When used in double line mode capacity is 3K. It has a pressure die cast drum for professional look and smooth finish to minimize the risk of strap fraying. The strap hoist has three operating positions: lift/pull, lower/release, and freewheeling.

Slingco Part No.	Type	SINGLE LINE						DOUBLE LINE							
		Capacity		Lift		Headroom		Capacity		Lift		Headroom		Tool weight	
		lb	kg	ft	m	in	mm	lb	kg	ft	m	in	mm	lb	kg
ZLH10504	Standard	1,500	680	9	2.7	17.5	444.5	3,000	1,360	4.25	1.3	22	558.8	11.25	5.1
ZLH10524	Hot stick operated	1,500	680	9	2.7	17.5	444.5	3,000	1,360	4.25	1.3	22	558.8	11.5	5.22

## 4K STRAP HOIST

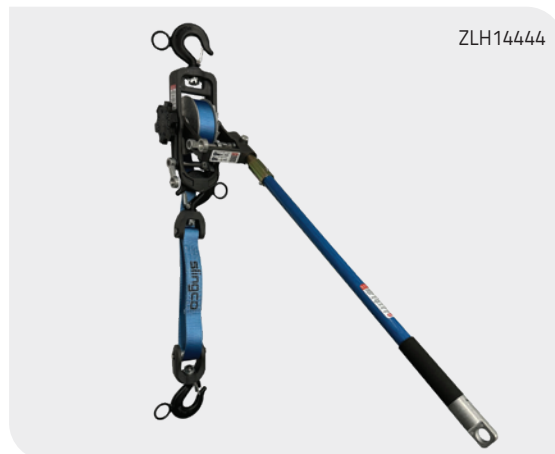

The Slingco 4K strap features a Hi-Viz blue strap for easy identification. In single line mode capacity is 2K. When used in double line mode capacity is 4K. The 4k Strap Hoist has a pressure die cast drum for professional look and smooth finish to minimize the risk of strap fraying. The strap hoist has three operating positions: lift/pull, lower/release, and freewheeling. Strap hoists come in standard and hot stick operable versions.

Slingco Part No.	Type	SINGLE LINE						DOUBLE LINE							
		Capacity		Lift		Headroom		Capacity		Lift		Headroom		Tool weight	
		lb	kg	ft	m	in	mm	lb	kg	ft	m	in	mm	lb	kg
ZLH14335	Standard	2,000	907	11	3.4	16.5	419.1	4,000	1,814	5.5	1.7	22.5	571.5	14.28	6.48
ZLH14444	Hot stick operated	2,000	907	11	3.4	16.5	419.1	4,000	1,814	5.5	1.7	22.5	571.5	14.89	6.75

 **WARNING**

Cancer and Reproductive Harm  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



**Slingco America, Inc.**  
3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA  
TOLL FREE: 888 685 9478 · [sales@slingcoamerica.com](mailto:sales@slingcoamerica.com)

For any inquiries call or visit  
**888 685 9478 | [slingco.com](http://slingco.com)**